


Applications:

Used to measure pressure and temperature of ammonia systems.



Specifications:

■ Dial	2.5"(50mm),4"(100mm),6"(160mm)
■ Case	Stainless steel / Black Paintied Steel
■ Lens	Polycarbonate
■ Ring	Stainless steel / Black Paintied Steel
■ Internal	Stainless steel / Painted steel
■ Connection	1/4" NPT
■ Range	30-0-150 PSI/F, 30-0-300 PSI/F
■ Accuracy	±1.0%,±1.5%,±3-2-3%

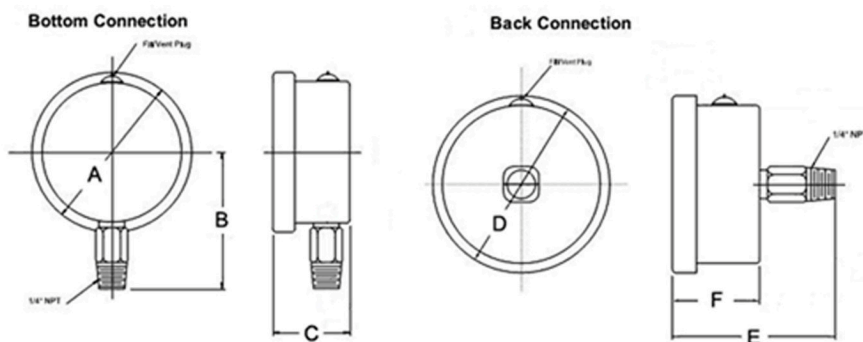

Dial	A	B	C	D	E	F
2.5" (63mm)	2.750" (69.8mm)	2.350" (59.6mm)	1.320" (33.5mm)	2.740" (69.5mm)	2.525" (64.1mm)	1.35" (34.3mm)
3.5" (90mm)	3.819" (96.9mm)	4.843" (122.9mm)	1.323" (33.5mm)			
4" (100mm)	3.941" (100.0mm)	4.900" (124.4mm)	1.460" (37.1mm)	3.941" (100.10mm)	2.100" (53.34mm)	1.272" (32.309mm)