



## Applications:

Hydraulic shoring and irrigation equipment commonly used in long wall mining.



## Specifications:

■ Dial	2" (50mm)
■ Case	Brass case and socket one piece forged
■ Lens	PC
■ Liquid Fill	Glycerin
■ Ring	Stainless steel
■ Internal	Brass
■ Connection	3/8"Steck-O quick connection
■ Range	0-9000 PSI/BAR
■ Accuracy	±3-2-3%

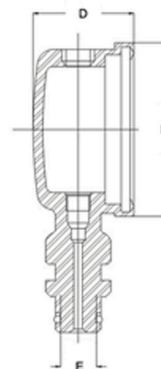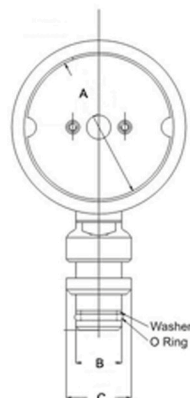

Dial	A	B	C	D	E	F
2" (50mm)	1.75" (44.5mm)	0.55" (14mm)	0.79" (20mm)	1.22" (31mm)	0.43" (11mm)	2.1" (53.5mm)