


Applications:

Designed to be welded in place within the system. Slow velocity (i.e. a feed water system on a boiler)



Specifications:

■	Material	SS304 or SS316
■	thermometer connection	1/2"NPT
■	bore	0.260"(65mm) or indicated

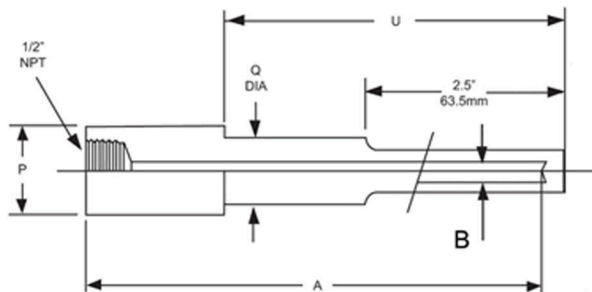

Stem	U	Q	P	B	Material
4" (100mm)	2.5"	1/2"	1.05"	0.260" (6.6mm)	304 SS 316 SS
6" (150mm)	4.5"	3/4"	1.05"	0.260" (6.6mm)	
9" (228.6mm)	7.5"	3/4"	1.05"	0.260" (6.6mm)	
12" (304.8mm)	10.5"	3/4"	1.05"	0.260" (6.6mm)	